




## BLACK STASH CHINSCOOP INSTALL INSTRUCTIONS



Thank you for purchasing Paul Yaffe's Bagger Nation products. Please read through these instructions completely before attempting installation.



1. The contents of your Black Stash Chin Scoop should include (1) Black Stash Chin Scoop (1) perforated grill (2)  $3/8 - 16 \times 1$ " hex bolts (2) 3/8 flast washers (2) 3/8 lock washers. (Fig # 1)

Let's begin...







2. Remove stock radiator shroud by removing torx screw shown in (Fig #2). Then pull plastic tab away from radiator top, releasing shroud. A large flat blade screw driver helps. (Fig # 3 + #4)

Note: This will leave upper shroud mount tabs exposed (Fig #5)











- 3. Depending on your M8 Softails equipment locate the second foot control mounting hole from front. If it has a plastic hole plug, remove it at this time on both sides. (Fig #6 + #7 + #8)
- 4. The Blask Stash Chin Scoop is simple to install. It hooks over the upper radiator tabs and then is bolted through the unused control holes in frame from the inside. The radiator tabs can be adjusted if needed to keep the top of Scoop snug. (Fig #9 10)







Install the scoop over radiator top tabs & slide lower mount tabs between the frame rails until the mount holes in scoop align with the holes in the frame. Install the (2)  $3/8 - 16 \times 1$ " hex bolts w/ flat & lock washers. Loosely snug. Check upper tab fitment for a snug fit & gently bend tabs to snug up if needed. (Fig #11 - 13)







Tip: I like to paint exposed bolt ends black to disappear. (Fig #14)

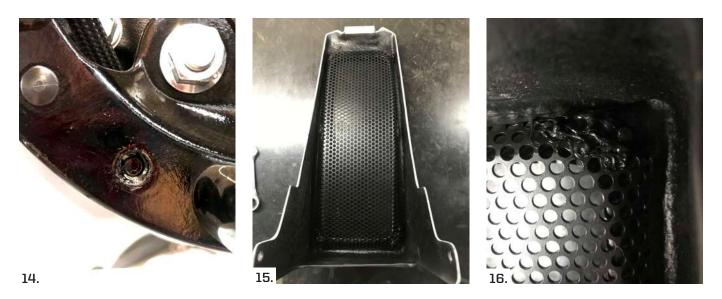

5. Remove Chin Scoop & paint... Silicon or epoxy grill inside...final install (Fig #15 - #18)



Thanks for choosing Bagger Nation Designs!







602.840.4205 BAGGERNATION.COM